


RSR10/15-S

主要参数表/Dimensions

直流电阻 DC resistance	13 (Ω)
电磁感应 Inductance ($\phi = 0^\circ$)	0.6 (mH)
使用饱和升温值 $\Delta\theta_s$ (at 20°C) Saturation temperature rising rate of coil	$\Delta\theta_s \approx 21.5 \times W$ (°C) $K \approx 21.5$ (°C/watt)
线圈的饱和温升 Time constant of temperature rise	0.5 (分/Minutes)
耐热等级 Heat resistance class	ClassE (120°C)
绝缘阻抗 Insulation resistance	DC500Vメガー、100MΩ以上 DC500V MEGA、Over 100MΩ
绝缘强度 Dielectric strength	AC500V、50/60Hz、1 (分/Minutes)
惯性扭矩 Moment of inertia	0.017 (g·cm ²)
重量 Mass	8 (g)




外形尺寸图/Outside dimension

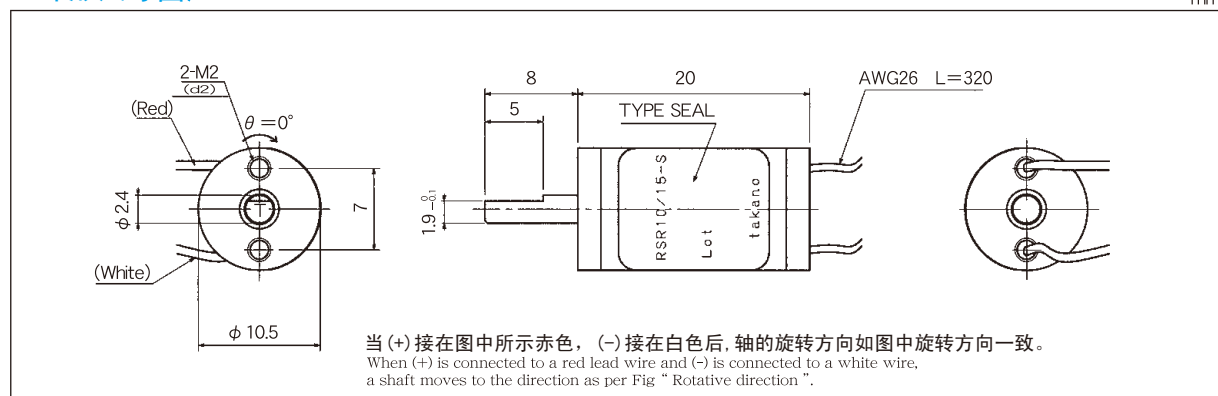

扭矩特性图

Torque characteristics

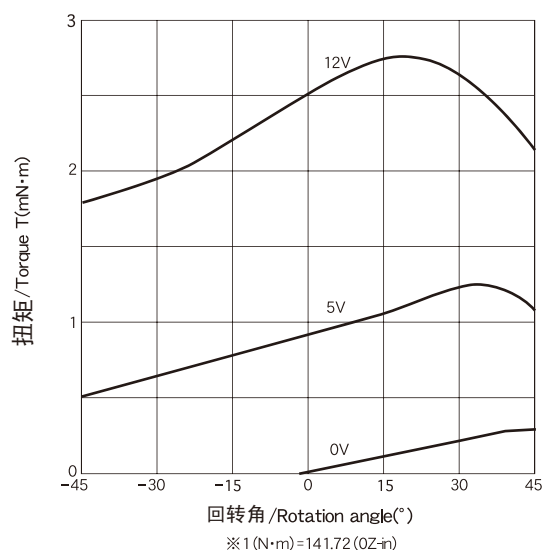

响应特性图(无负载, 水平状态)

Response characteristics (No-load, horizontally placed)

